

# SHORT PANEL CARRIAGE



# CHOOSE YOUR OPTIONS

INSULATION	ThermoGuard™	ThermoSteel™	TS-138	Series 24
Foam/Insulate	Polyurethane	Polystyrene	Polystyrene	Plain Steel/ T-Bond
R-Value	18.0	9.25	7.50	T-Bond: 7.0
U-Factor (Btu/hr/ft2/F)	0.136	0.220	0.264	0.376
Thickness	2 inches	2 inches	1¾ inches	2 inches
Exterior Steel	27 gauge	25 gauge	27 gauge	24 gauge
Interior Steel	27 gauge	25 gauge	27 gauge	N/A
Warranty* <i>Excludes Springs</i>	Lifetime	Lifetime	25 years	Lifetime

## COLORS


White	•	•	•	•
Almond	•	•	•	•
Sandtone	•	•	•	•
Tera-Bronze	•	•	•	•
Green	•	•	•	•
Gray	•	•	•	•
Coffee	•	•	•	•
Black	•	•	•	•
Light Oak	•	•	•	•
Dark Oak	•	•	•	•
Rosewood	•	•	•	•
Color Select™	•	•	•	•

\*For full warranty details contact your Midland dealer

\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.




## HARDWARE

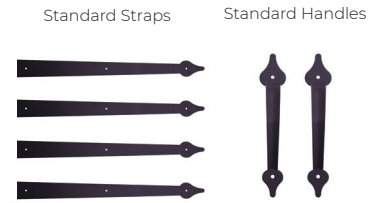

## COLORS



## WINDOWS

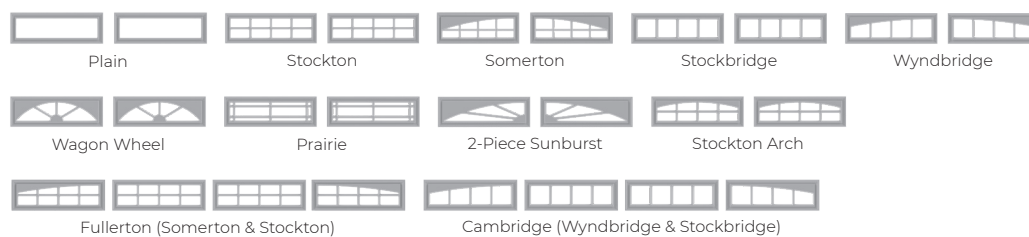

## GLASS



\*Tempered only. All other glass is available in both tempered and untempered.

**MIDLAND™**  
GARAGE DOOR MFG CO

midlandgaragedoor.com • 800.437.4056

YOUR LOCAL GARAGE DOOR PROFESSIONAL